
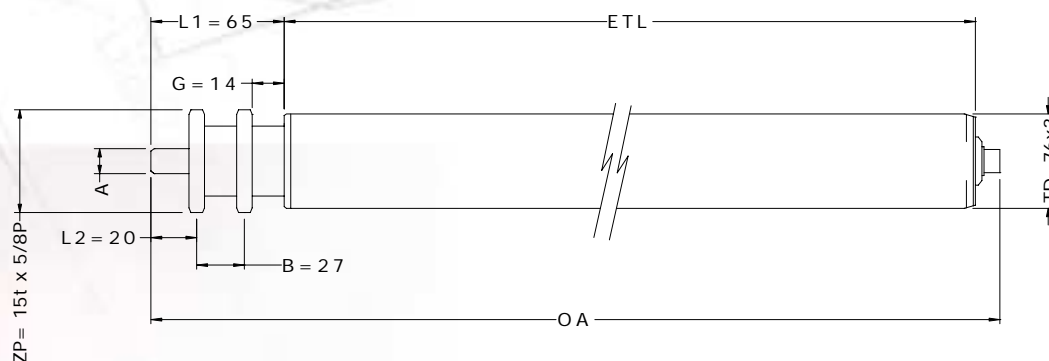


CHAIN DRIVEN ROLLERS WITH 15T x5/8p" FIXED PINION

Rollers are constructed from BZP steel tube & incorporate self colour steel axles as standard.



Tubes can be externally covered using Rubber, Polyurethane & PVC sleeved in a variety of colours.



1tonne* Fixed drive pallet rollers with steel sprocket with Ø16 through axle

TD AVAILABLE	Roller Type	Female thread (AX8 axle) A= Ø16	Bearing type	Max. roller speed	Max. roller capacity
Ø76x3	CDR76-DSIM-15T58P-16AX8	M8x15, M10x25 & M12x30	Steel housed 6905 +2 R10	80 m/min.	230 KGf

*based on min. of 10 rollers supporting each pallet

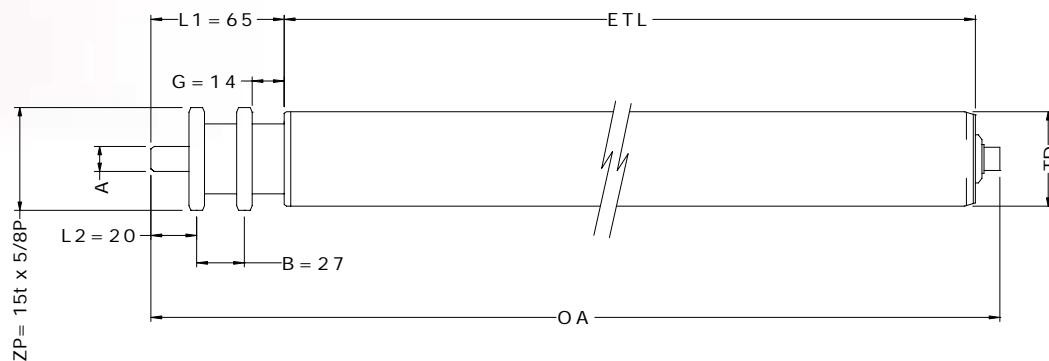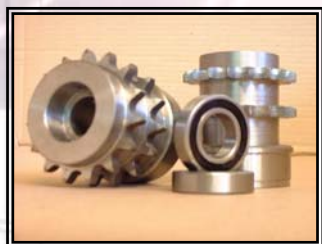

Fixed drive pallet rollers with steel sprocket with Ø20 through axle

TD AVAILABLE	Roller Type	Female thread (AX8 axle) A=Ø20	Bearing type	Max. roller speed	Max. roller capacity
Ø76x3	CDR76-DSIM-15T58P-AX8	M10x25 or M12x30	Steel housed 6905 +2x6004	80 m/min.	300 KGf
Ø80x2	CDR80-DSIM-15T58P-AX8	M10x25 or M12x30	Plastic housed 6204 +2x6004	80 m/min.	252 KGf
Ø80x3 new!!	CDR803-DSIM-15T58P-AX8	M10x25 or M12x30	Plastic housed 6204 +2x6004	80 m/min.	300 KGf
Ø89x3	CDR89-DSIM-15T58P-AX8	M10x25 or M12x30	Steel housed 6204 +2x6004	80 m/min.	459 KGf

We also manufacture made measure replacement rollers-please select which type from the CDR template sheet on reverse

