

Taper Rollers for bends & curves

TR54 Series





TR54 Series are designed for Gravity bends & fitted with free rolling bearings for effortless product transfer (Bearing type KTR.03 & MTR.20)

TR54G Series are designed powered bends on a line shaft / 24v powered system. Rollers are quiet running, fitted with sealed precision bearings & are of a robust construction for maximum (Bearing type 6202)

Found in conveyor bends/curves	Suits Inside Radius	EXTRAS
Boxes	850mm 900mm	Stainless Axles* Anti-StaticØ
Totes		
Tyres		


BASE ROLLER	GROOVES YES/NO	ROLLER TYPE	AXLE (AX1 / AX88)	Max. Carton	BEARING TYPE
Ø50 PLASTIC*	NO	TR54-PRG	*Ø10 Ø12 & 11HEX	30KGS	KTR.03 PLASTIC
Ø50 BZP STEEL	NO	TR54	Ø10 Ø12 & 11HEX	50KGS	MTR.20 STEEL
Ø50 BZP STEEL	YES	TR54G	Ø10 Ø12 & 11HEX	50KGS	STEEL +6202ZZ
Ø50 STAINLES STEELØ	YES	SSTR54GS	Ø10 Ø12& 11HEX	50KGS	PLASTIC +S62022RS

Rollers are compatible with 1700-SX0

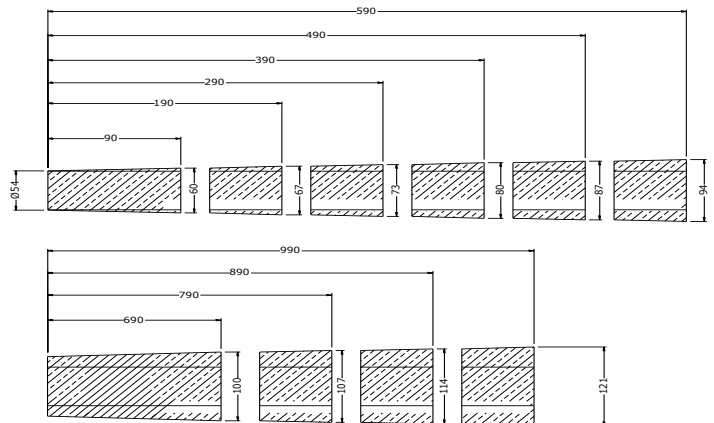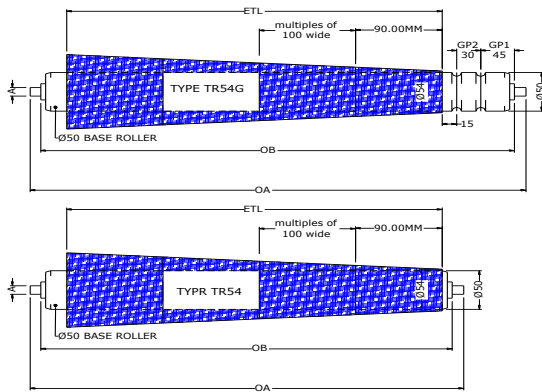

ROLLER TYPE =	
AXLE LENGTH OA =	
OVER BOSS OB =	
AXLE SIZE A=	
AXLE MATERIAL =	Mild steel / stainless
AXLE TYPE	AX1 or AX88
QUANTITY REQUIRED =	
NOTES:	

AXLE OPTIONS

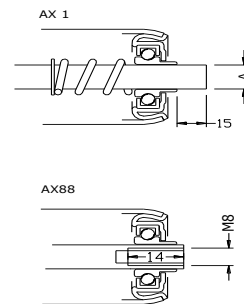

Company Name and address:-

Signed.....Print.....

Date:

Purchase order No.:

Collect or AED to despatch – circle as appropriate

Please sign & return Order