

PR Series Steel Gravity / Powered Rollers Medium to Heavy duty




PR series are general purpose steel rollers with precision bearing (pop metric) for manual/powered applications


Found in >	MATERIAL	TUBE EXTRAS
Belt Conveyors	Zinc Plated (BZP) tube Steel bearings & Steel axles	Rubber Sleeve
Farming Equipment		Bonded Rubber
Airports		Polyurethane
Cutting Equipment		

Roller Type	Roller Diameter & wall thickness	○ Axle	⬡ Axle	Bearing Type +Housing	Load Capacity†
PR-25	∅25.4 x2	∅8	-	608	35kgF udl
PR-35	∅35 x1.2	∅8	8H	6001+PLASTIC	50kgF udl
PR-38 /PR-38HD	∅38 x3	∅11 ∅15*	11H	6202	160kgF udl
PR-40	∅40 x1.5	∅8 ∅10 ∅11 ∅12 ∅15*	11H	6002 +PLASTIC	80kgF udl
PR-50	∅50 x1.5	∅8 ∅10 ∅11 ∅12 ∅14 ∅15 ∅17	11H	6202/6003+STEEL	160kgF udl
PR-50MD	∅50.8 x2	∅8 ∅10 ∅11 ∅12, ∅14 ∅15 ∅17	11H	6202/6003+STEEL	160kgF udl
PR-50HD	∅50.8 x3	∅10 ∅11 ∅12 ∅14 ∅15 ∅17	11H	6202/6003+STEEL	160kgF udl
PR-60	∅60 x2	∅10 ∅11 ∅12 ∅14 ∅15	11H	6202/6003+STEEL	160kgF udl
PR-60HD	∅60 x2.6	∅17	-	6203+STEEL	300kgF udl
PR-603	∅60 x3	∅16	14H	6204+STEEL	335kgF udl
PR-63	∅63.5 x3	∅16 ∅20*	14H	6204+STEEL	350kgF udl
PR-70	∅70 x2	∅15 ∅17	-	STEEL+6202/6003	180kgF udl
PR-703	∅70 x3	∅17	-	STEEL+6203	350 kgF udl
PR-76	∅76 x3	∅16 ∅19	14H /17H	6905+STEEL	350kgF udl
PR-76hd6	∅76 x5	∅20* ∅25*	-	6204/6005+STEEL	450kgF udl
PR-80HD	∅80 x2	∅20	-	6204+PLASTIC	250kgF udl
PR-803KTR	∅80 x3	∅20*	-	6204+STEEL	365kgF udl
PR89KTR	∅89 x3	∅20*	-	6204+STEEL	450kgF udl

IMPORTANT: Axles* do not have a bearing boss. †Load Capacity calculated on standard lengths & axle fixing. Please ask to confirm advisable load on quotation/order

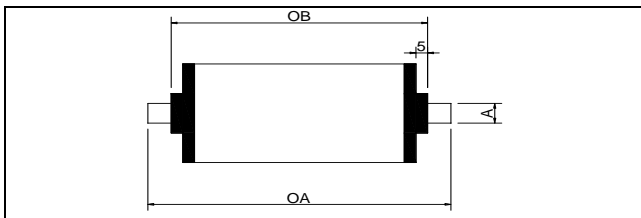

Roller Type (ie PR-63)	
Axle length OA	
Over boss OB	
Axle size (ie 11H)	
Axle Type & Dimension (ie AX8 M8x16L)	
Quantity Required	
Notes:	

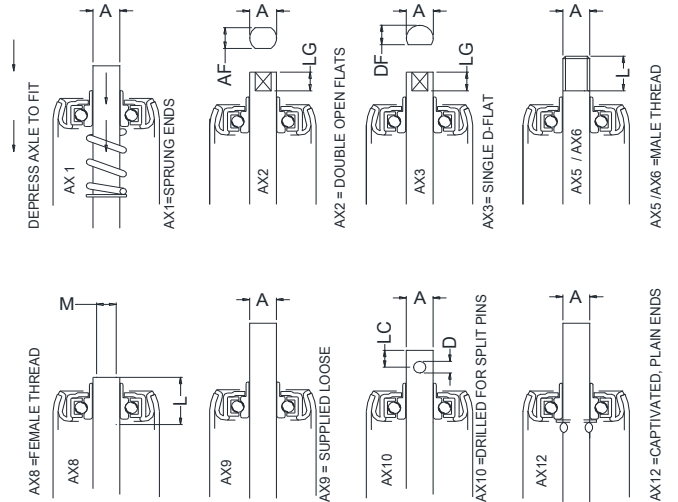

Company Name and address:-

Signed.....Print.....

Date: Purchase order No.....

Collect or Send by Carrier – circle as appropriate

Comments:

Please sign & return Order