
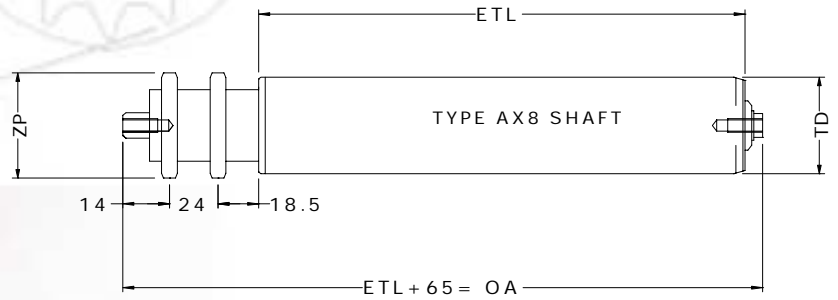


# CHAIN DRIVEN ROLLERS WITH BS 1/2"p D/SIMPLE TEETH


Rollers are constructed from BZP steel tube & incorporate self colour steel axles as standard.

Tubes can be externally covered using Rubber, Polyurethane & PVC sleeved in a variety of colours.

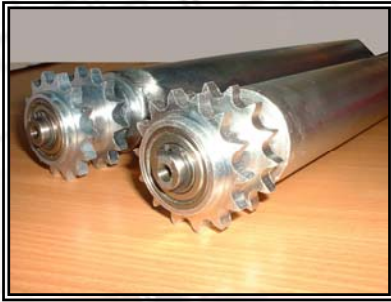

Fixed drive rollers with Female Thread (AX8) Fixing

TUBE DIA (TD)	Roller Type	Female thread (AX8 axle)	Bearing type	ZP	Max. roller capacity
Ø40x1.5	CDR-40-DSIM-AX8	M6x12, M8x15	Steel housed 6202 zz Precision	13T, 14 & 15T	80 KGf
Ø50x1.5	CDR-50-DSIM-AX8	M6x12, M8x15 & M10x25	Steel housed 6002 zz Precision	13T, 14 & 15T	160 KGf
Ø51x2	CDR-50MD-DSIM-AX8	M6x12, M8x15 & M10x25	Steel housed 6002 zz Precision	13T, 14 & 15T	160 KGf
Ø60x2	CDR-60-DSIM-AX8	M6x12, M8x15 & M10x25	Steel housed 6202 zz Precision	14T, 15 & 17T	182 KGf
Ø63.5x3	CDR-63-DSIM-AX8	M8x15, M10x25 OR M12x30	Steel housed 6905 +2x6004	14T, 15 & 17T	300 KGf
Ø76x3	CDR-76-DSIM-AX8	M8x15, M10x25 OR M12x30	Plastic housed 6204 +2x6004	14T, 15 & 17T	300 KGf
Ø80x2	CDR-80-DSIM-AX8	M8x15 OR M10x25	Plastic housed 6204 +2x6004	14T, 15 & 17T	252 KGf

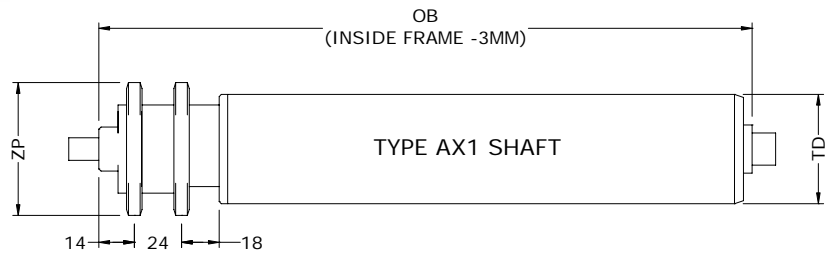

Fixed drive rollers with Sprung Shaft (AX1) Fixing

TUBE DIA (TD)	Roller Type	S/loaded (AX1 axle)	Bearing type	ZP	Max. roller capacity
Ø40x1.5	CDR-40-DSIM-AX1	Ø11 or 11 hex.	Steel housed 6202 zz Precision	13T, 14 & 15T	80 KGf
Ø50x1.5	CDR-50-DSIM-AX1	Ø11, 12 & 14 or 11 hex.	Steel housed 6002 zz Precision	13T, 14 & 15T	160 KGf
Ø51x2	CDR-50MD-DSIM-AX1	Ø11, 12 & 14 or 11 hex.	Steel housed 6002 zz Precision	13T, 14 & 15T	160 KGf
Ø60x2	CDR-60-DSIM-AX1	Ø11, 12 & 14 or 11 hex.	Steel housed 6202 zz Precision	14T, 15 & 17T	160 KGf
Ø63.5x3	CDR-63-DSIM-AX1	Ø16, 19 & 20	Steel housed 6905 +2x6004	14T, 15 & 17T	300 KGf
Ø76x3	CDR-76-DSIM-AX1	Ø16, 19 & 20	Steel housed 6905 +2x6004	14T, 15 & 17T	300 KGf
Ø80x2	CDR-80-DSIM-AX1	Ø11, 12 & 14 or 11 hex.	Plastic housed 6204 +2x6004	14T, 15 & 17T	182 KGf

