


GRP-Grooved Rollers For Round Belt Drive

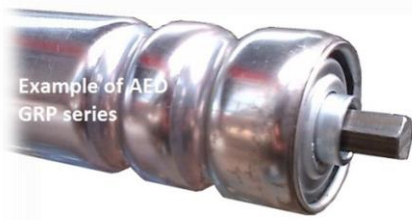

GRP series line shaft rollers have single, double or triple groove for round poly or elastomer bands. These rollers will also suit 24volt powered rollers.


| Found in> | MATERIAL | TUBE EXTRAS |
|------------------|-------------------|---------------|
| Warehouses | Zinc Plated Steel | Rubber Sleeve |
| Factories | tube | Bonded Rubber |
| Production Lines | Stainless Steel | Polyurethane |
| Packing Lines | tube | |

| Roller Type | Roller Diameter & wall thickness | Material | ○ Axle | ⬡ Axle | Bearing Type +housing |
|-------------|----------------------------------|-----------------|--------------------|----------|-----------------------|
| GRP-25 | Ø25 x2 wall | BZP STEEL | Ø8 | - | 608 |
| GRP-35 | Ø35 x1.2 wall | BZP STEEL | Ø8 | 8H | Plastic+6001 |
| SSGRP-35 | Ø35 x1.2 wall | STAINLESS STEEL | Ø8 | 8H | Plastic+6001 |
| GRP-40 | Ø40 x1.5 wall | BZP STEEL | Ø8 Ø10 Ø12 | 11H | Plastic+6002 |
| SSGRP-40 | Ø40 x1.5 wall | STAINLESS STEEL | Ø8 Ø10 Ø12 | 11H | Plastic+6202 |
| GRP-50† | Ø50 x1.5 wall | BZP STEEL | Ø10 Ø12 Ø14 | 8H + 11H | Steel +6202 |
| SSGRP-50† | Ø50x1.5 wall | STAINLESS STEEL | Ø10 Ø12 Ø14 | 8H + 11H | Plastic +6202 |
| M8-GRP50† | Ø50x1.5 wall | BZP STEEL | Eco Roller-M8 Only | - | Plastic + 6202 |
| GRP-60 | Ø60 x2 wall | BZP STEEL | Ø10 Ø12 Ø14 | 11H | Steel + 6202 |

†These are also available with taper segments (TR54) for Bends/Curves.

† Load Capacity is limited by the torque of the drive belt to <29kg F. Please ask us to confirm advisable load on

| | |
|---------------------------------------|--|
| Roller Type (ie GRP-50) | |
| Axle length OA | |
| Over boss OB | |
| Axle size (ie 11H) | |
| Axle Type & Dimension (ie AX8 M8x16L) | |
| Quantity Required | |
| Notes | |

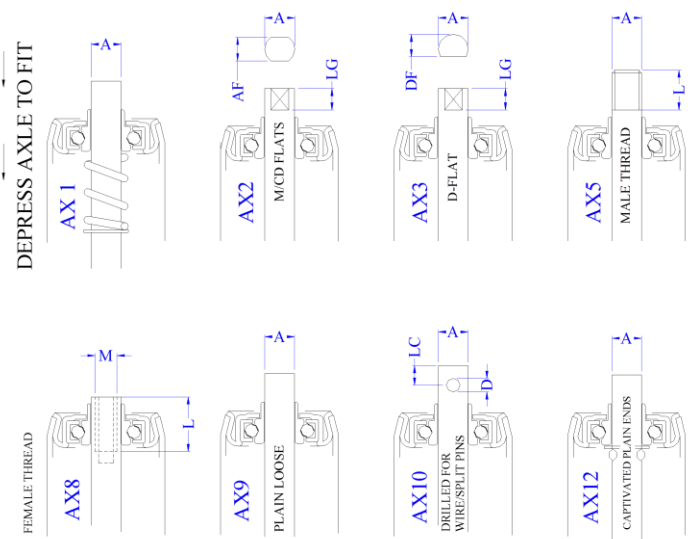

Company Name and address:-

Signed.....Print.....

Date:

Purchase order No.:

Collect or AED to despatch – circle as appropriate

Please sign & return Order